

DC110



ASSA ABLOY DC110

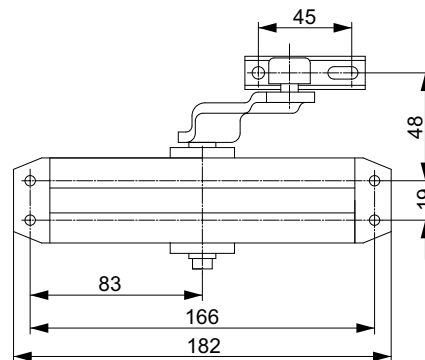
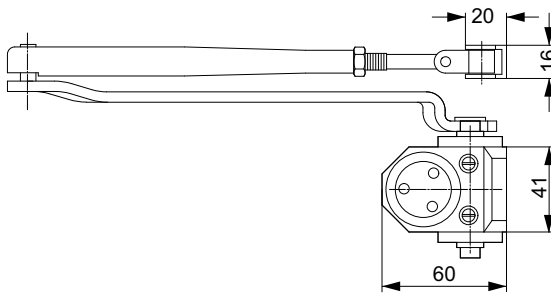
- Rack and pinion door closer with link arm
- Certified in compliance with EN 1154, size 3
- For single action doors up to 950 mm

Characteristics DC110

- Can be used for left and right-handed doors
- Suitable for fire and smoke protection doors
- Closing and latching speed adjustable via regulating valves
- Thermodynamic valves for consistent performance
- Standard colours: silver EV1; white, similar to RAL9016; black, similar to RAL9005



CE	ASSA ABLOY AUBE ANJOU 10 avenue de L'Europe Parc d'Enterprises du Grand Troyes 10300 Sainte Savine	04
	1121-CPD-AD0054 EN 1154:1996+A1:2002	3 8 3 1 1 3
Dangerous substances: None		



Our service for you: here you can see the individual advantages of our door closer models for your respective field of business.

The advantages at a glance

Customer segment	Advantages
Project planners	- Compact design - Favourably priced, reliable closer model
Builders	- Quick and easy installation - Suitable for left and right handed doors - Easy to adjust
Trade	- Inexpensive closer model for standard doors - All-inclusive package with door closer and link arm
User	- Largely unaffected by temperature fluctuations thanks to thermodynamic valves


DC110

Technical attributes

Technical attributes	
Closing force	EN 3
Door width up to	950 mm
Fire and smoke protection	yes
Door swing directions	Left / right handed
Closing speed	Variable between 180°-0°
Latching speed	Variable between 15°-0°
Weight	1,5 kg
Height	41 mm
Depth	60 mm
Length	182 mm
Certified in compliance with	EN 1154
CE marking for building products	yes


Required space on doors

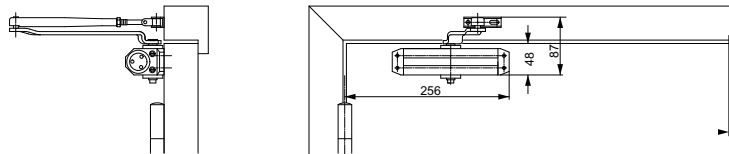Left handed shown in diagram
Right handed is the reverse



Installation dimensions

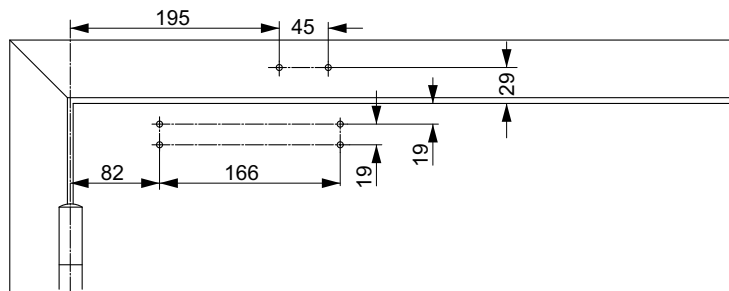Installation dimensions
EN3



You can find the complete specification on the internet at: [\(Link of your companies homepage\)](#)

Specifications for DC110

ASSA ABLOY Door Closer DC110 featuring rack and pinion technology in compliance with EN 1154

- Closing force EN size 3, for doors up to 950 mm wide
- Closing speed and latching speed continuously adjustable
- Suitable for fire and smoke protection doors
- CE approved
- Suitable for left and right handed doors

Colour:



- Silver EV1
- White, similar to RAL9016
- Black, similar to RAL9005

Description	Order no.	Description	Order no.
DC110 EN, size 3, silver EV1		Hold-open link arm L141, white, similar to RAL9016	
DC110 EN size 3, white, similar to RAL9016		Hold-open link arm L141, black, similar to RAL9005	
DC110 EN size 3, black, similar to RAL9005			
Hold-open link arm L141, silver EV1			




Installation Instructions

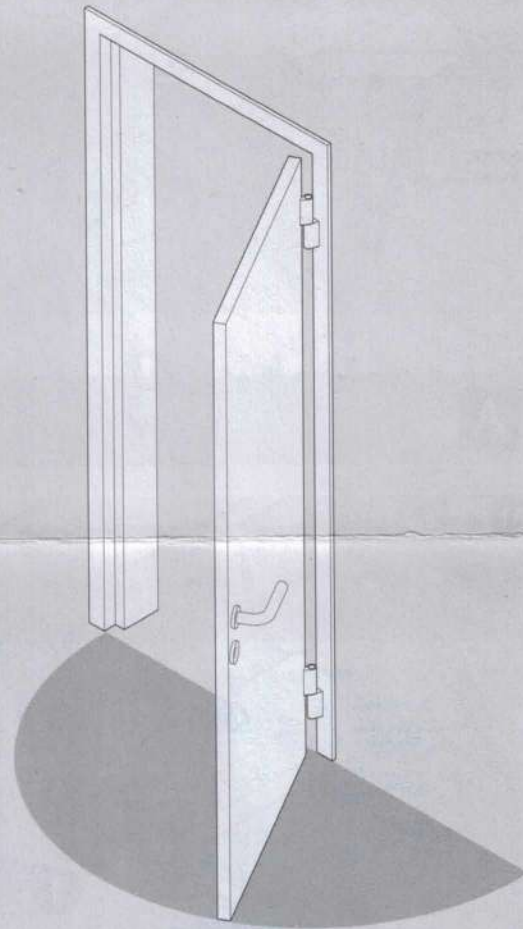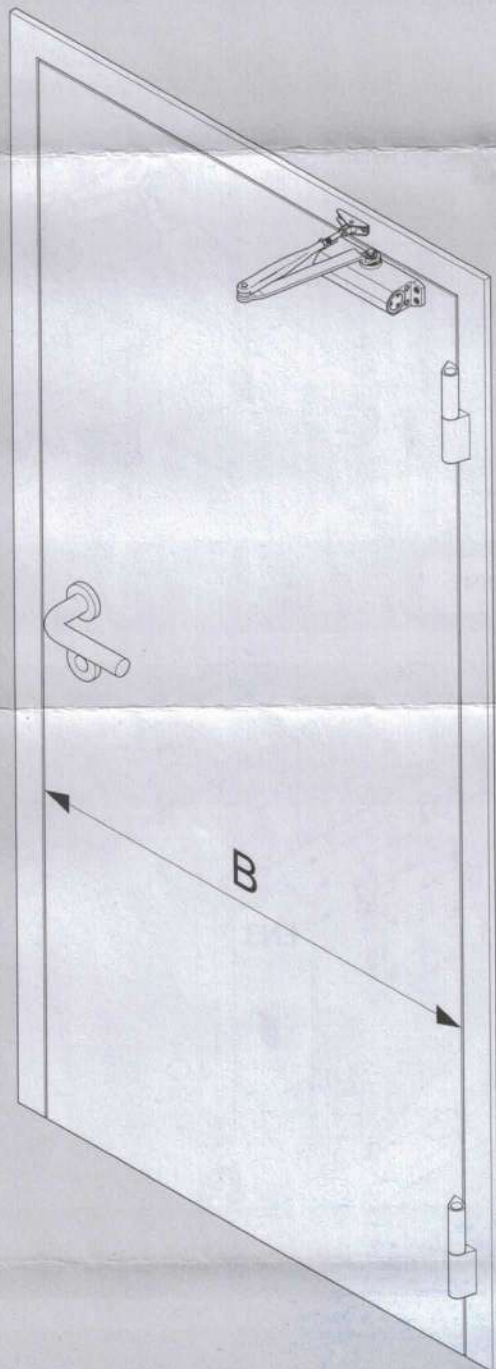D100406


The global leader in door opening solutions



max. 180°


	B	
	EN2	≤ 850mm
	EN3	≤ 950mm
	EN4	≤ 1100mm

DC110


	ASSA ABLOY Aube Anjou 10, avenue de l'Europe CS 50024 Sainte Savine 10304 TROYES Cedex-France		14					
	1121-CPR-AD5156	EN1154:1996+A1:2002+AC:2006	4	8	$\frac{2}{3}$ 4	1	1	3
Dangerous substances: none								



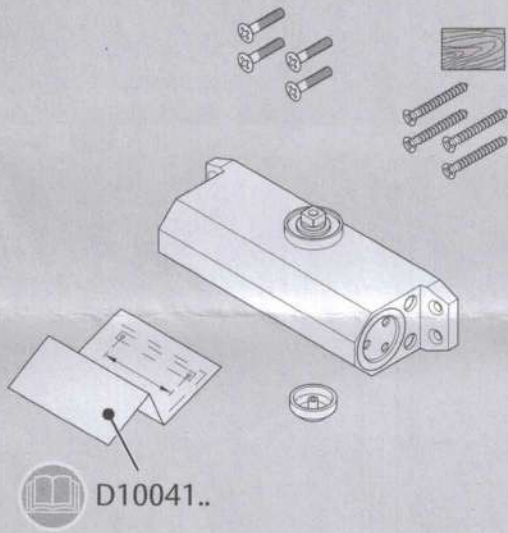
A



B

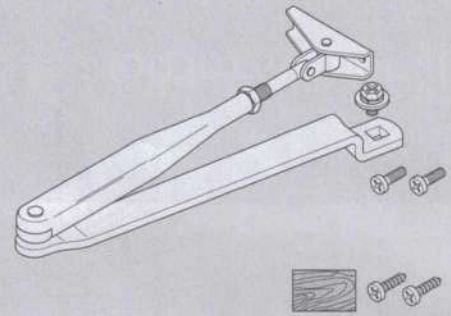


C Option

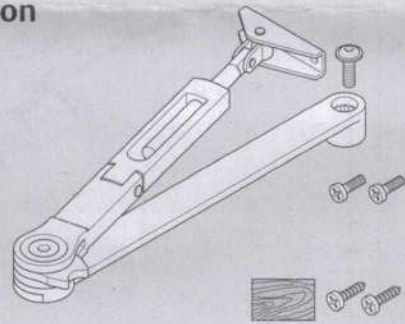

A


Doc. Nr.: D10041..






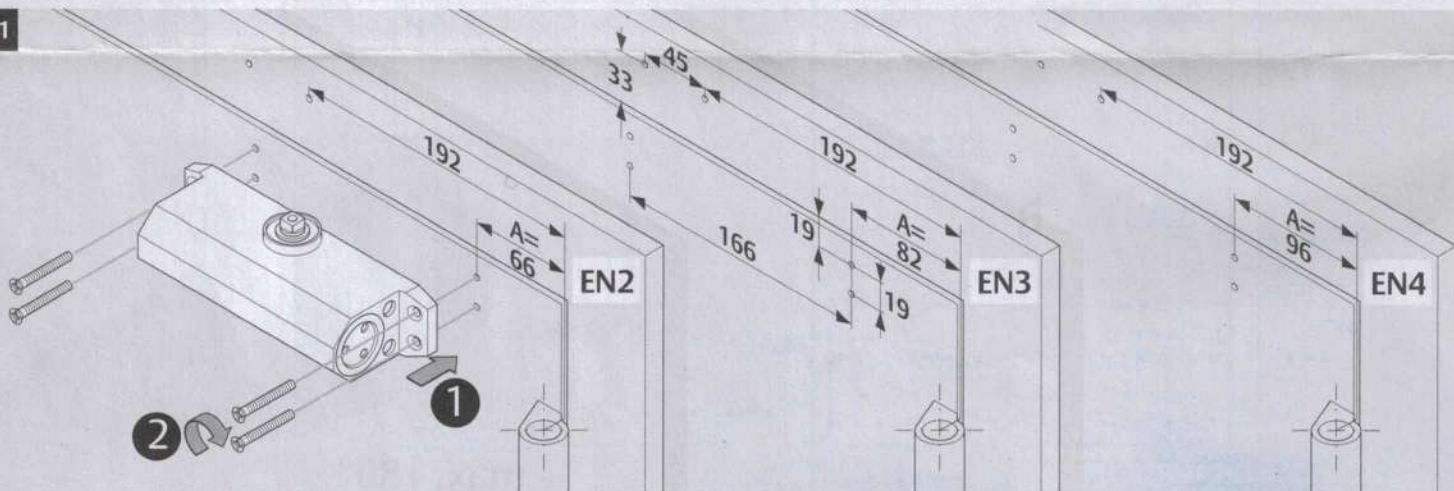
A1












B

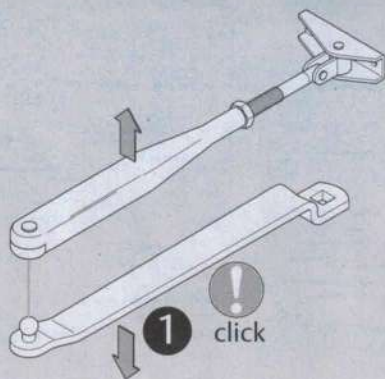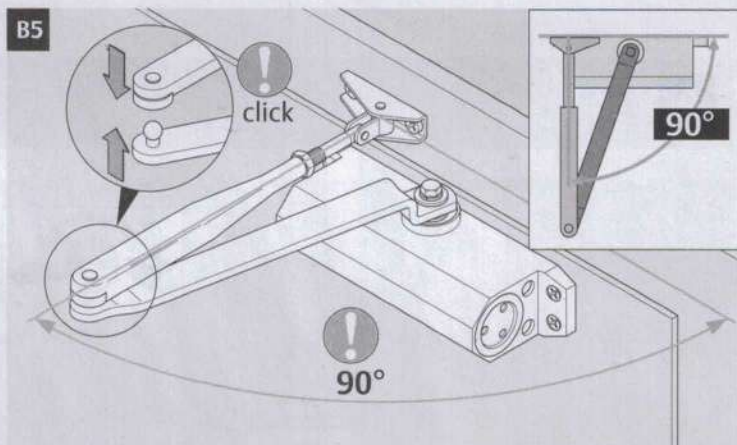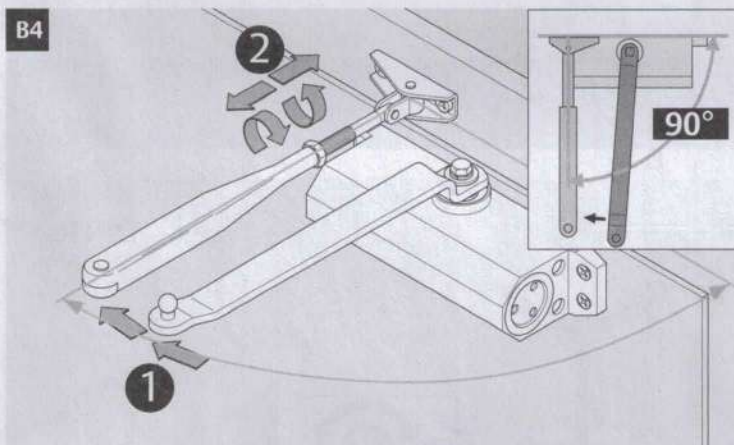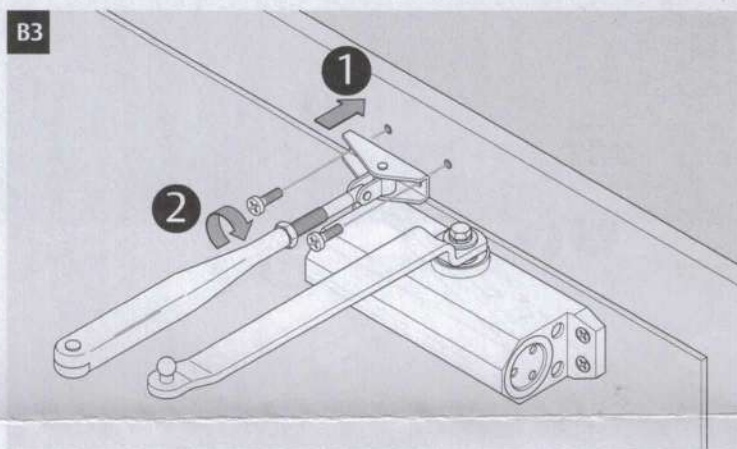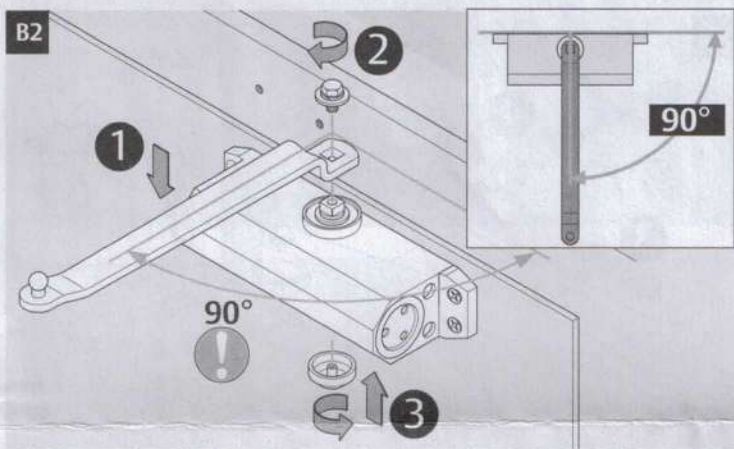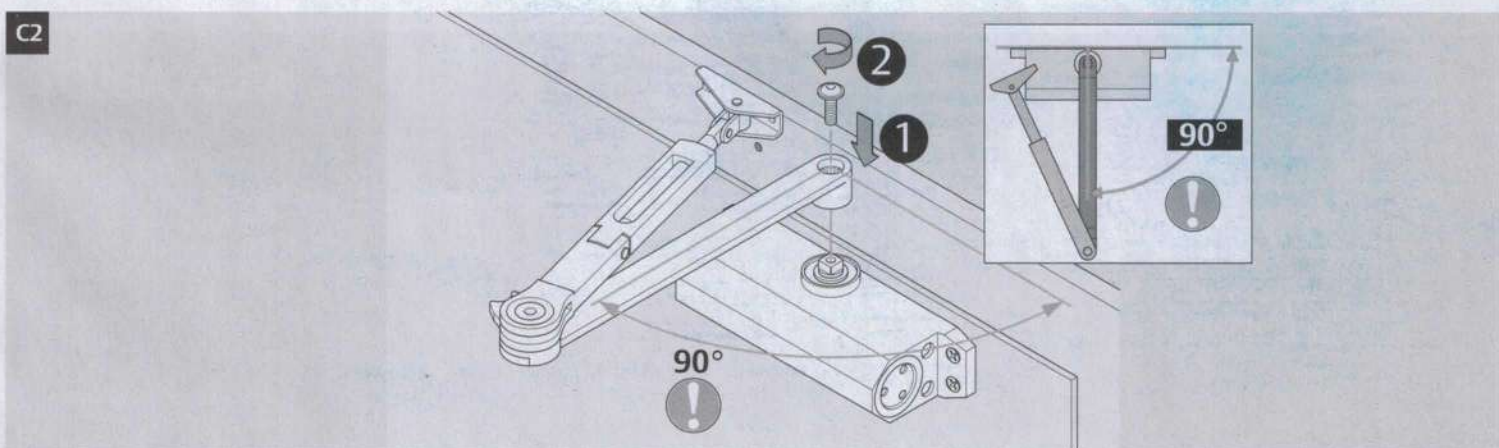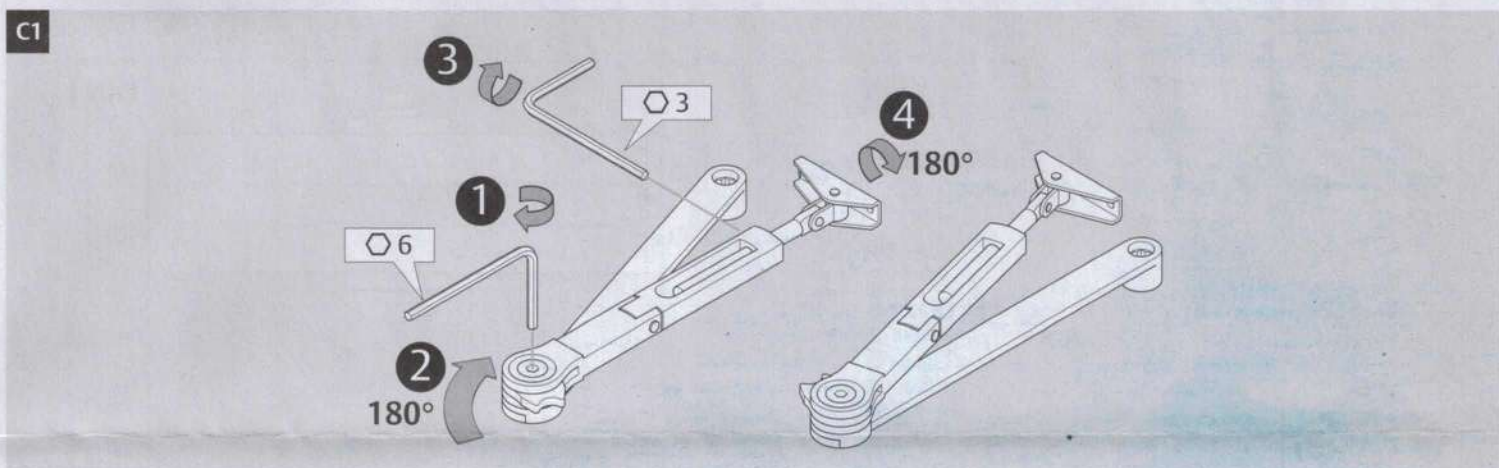B1



B**C**

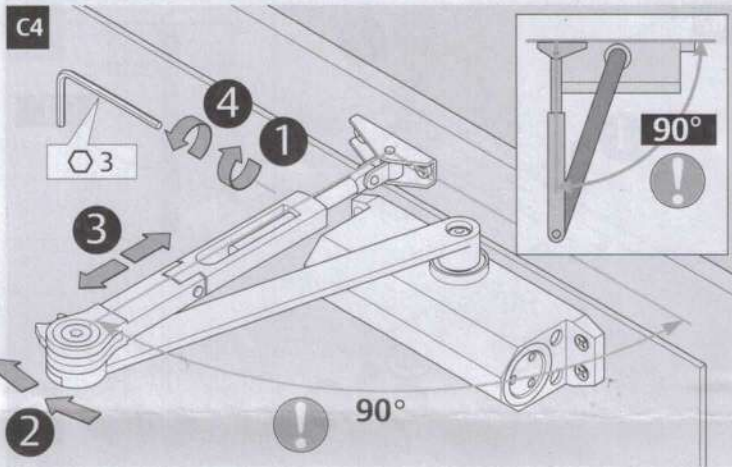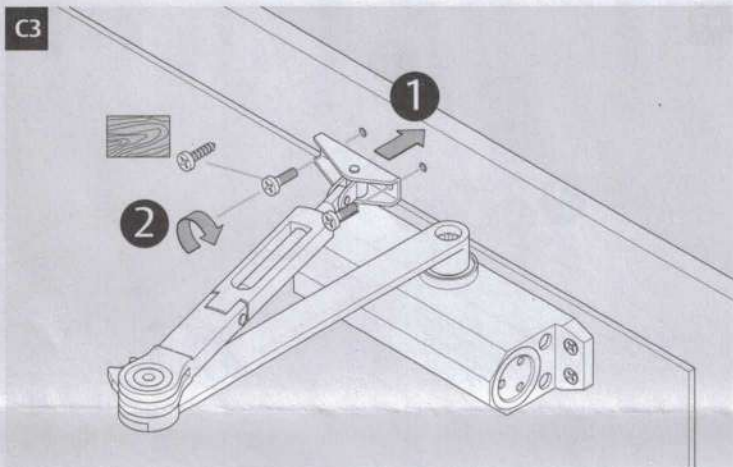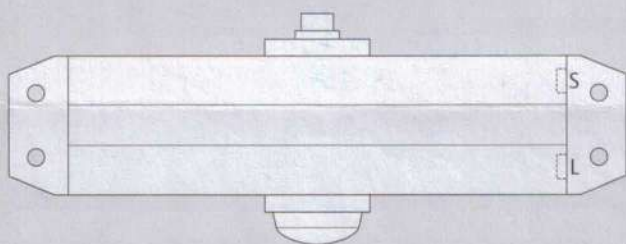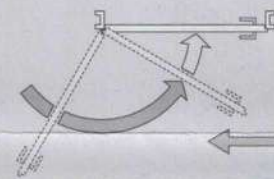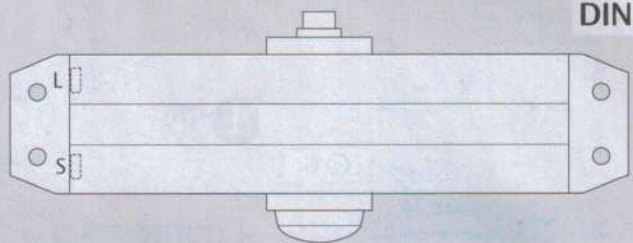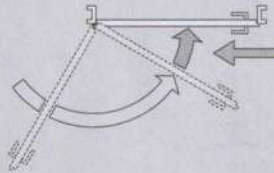C**A****DIN R****DIN L**

ASSA ABLOY is the global leader in door opening solutions dedicated to satisfying end-user needs for security, safety and convenience.

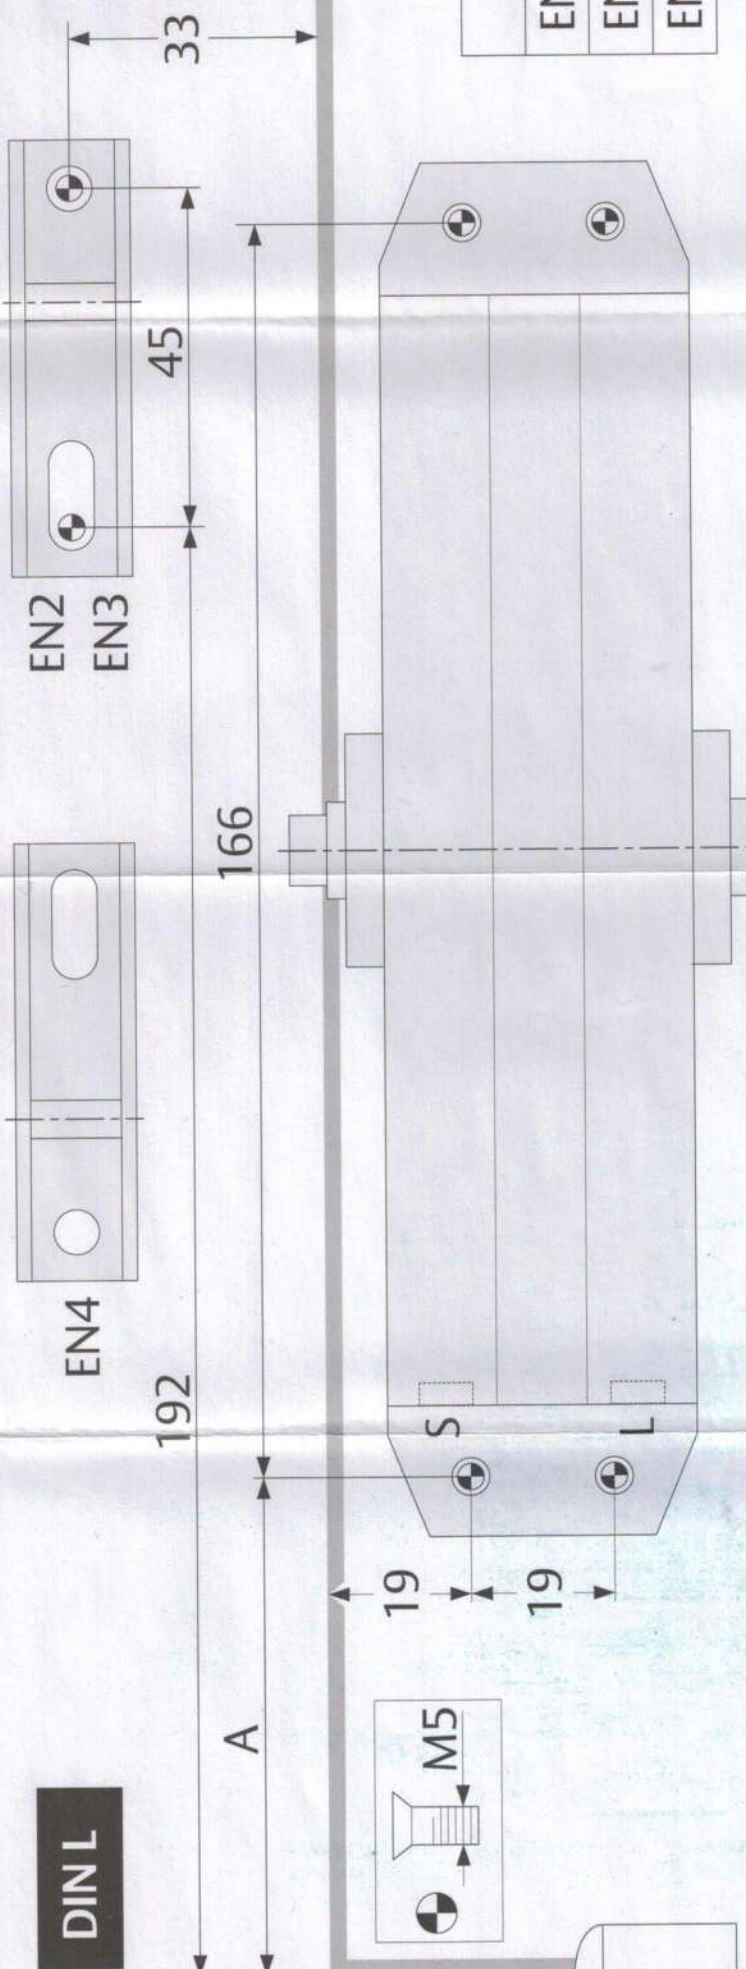
ASSA ABLOY

ASSA ABLOY Aube Anjou
10, avenue de l'Europe
CS 50024 Sainte Savine
10304 TROYES Cedex-France

Tél.: +33 (0)3 25 42 30 30
Fax: +33 (0)3 25 43 31 29


Declaration of performance:
www.vachette.fr/dop

DIN L



A	
EN2	66
EN3	82
EN4	96

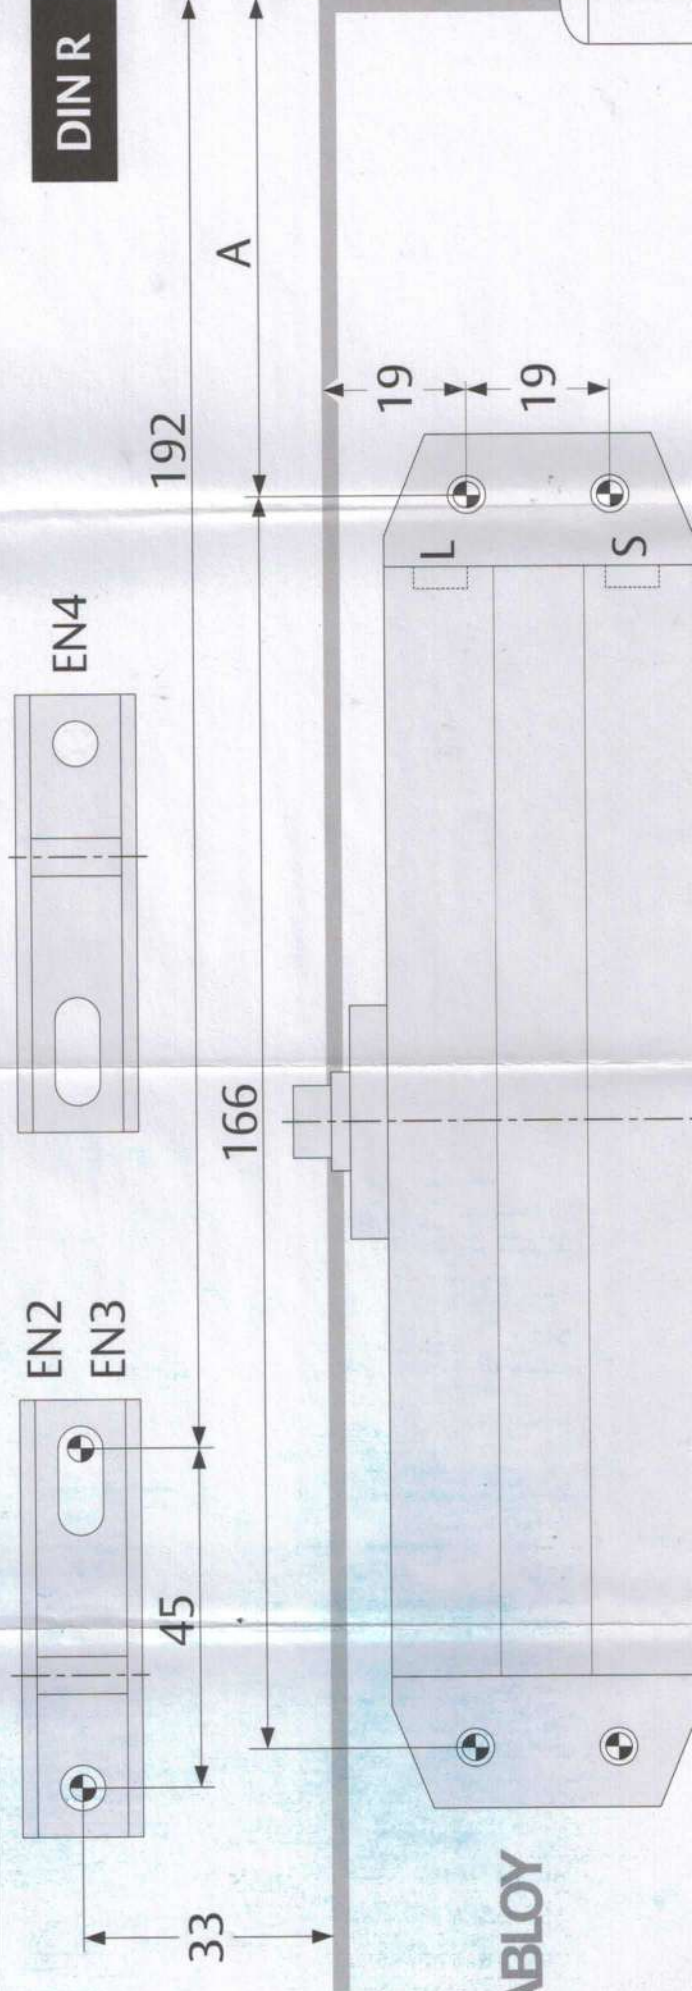DIN R



ASSA ABLOY

DC110